

DSN-DS-DN

DECONTACTOR™ AND MULTICONTACTS PLUGS AND COUPLER SOCKETS

Self-ejecting plugs: handle + inlet (male)


Mechanical self-eject systems work with a Voltage cord that activates the decontactor's latch to release the ejection force of the springs inside.

**Please contact us
for Part Numbers**

Fixed part



Mobile part

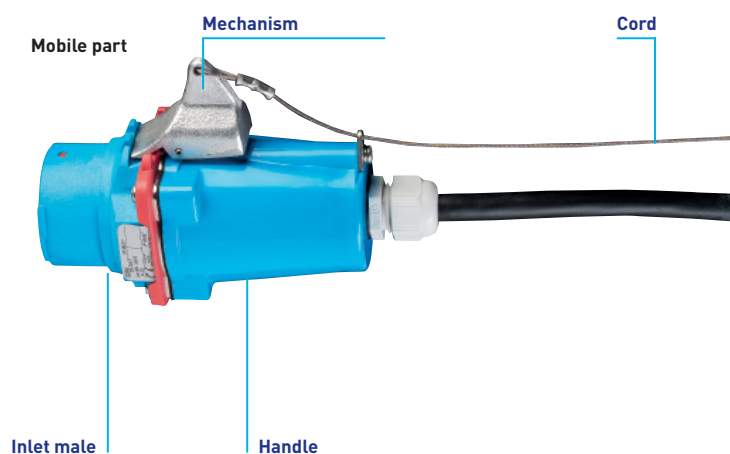

Self-ejecting coupler sockets: handle + socket-outlet (female)

A hook called «shark» is located on the connector. It is connected by a cable to the power cable. A pull on this rope actuates the hook that releases the plug.

Fixed part



Mobile part

