




PPI FOILS FOR SHIELDING AND WINDING

- PRE-INSULATED
- SELF ADHESIVE
- PRECISION DIE-CUT

FOR ELECTRICAL & ELECTRONIC APPLICATIONS

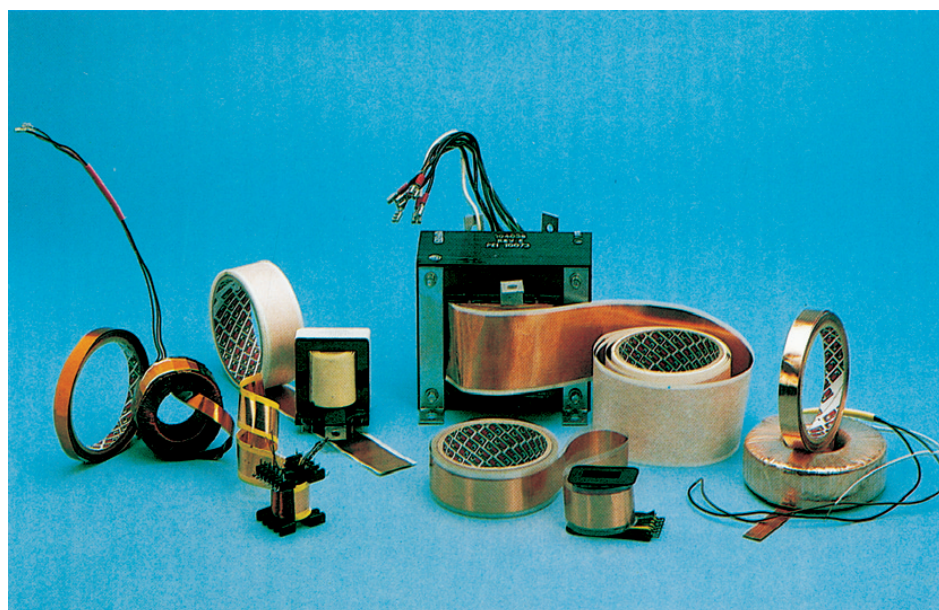

PPI Adhesive Products Ltd.,

Waterford Industrial Estate,
Cork Road,
Waterford,
Republic of Ireland.


Telephone: + 353 (0) 51 - 373- 555
Main Telefax: + 353 (0) 51 - 377- 687
R&D Telefax: + 353 (0) 51 - 373- 558
E-mail: info@ppi.ie
Internet: <http://www.ppi.ie>

*A Brand of
Quality To
Rely On...*



PPI ADHESIVE PRODUCTS LTD was originally established in 1970 and commenced production at Waterford Industrial Estate in 1971. Through our commitment to continuous product improvement and production innovation, PPI have become a world-renowned supplier on a global scale of specialist metal foil based laminates and precision die cut parts. Because we can directly control all of the coating, laminating and die cutting technologies within our group of companies, we can offer our customers products specifically tailored to their requirements and produced to the highest quality standards.

The major standards organisations throughout the world are presently planning more stringent regulations and limit values for electromagnetic fields. These regulations and limits will cover all of the useable frequencies in the electrical field from zero Hz upwards, with particular emphasis on the field of 50 Hz to 60 Hz. With the harmonization of these standards worldwide, shielding has become a far more important consideration in product design and will become compulsory in the near future.

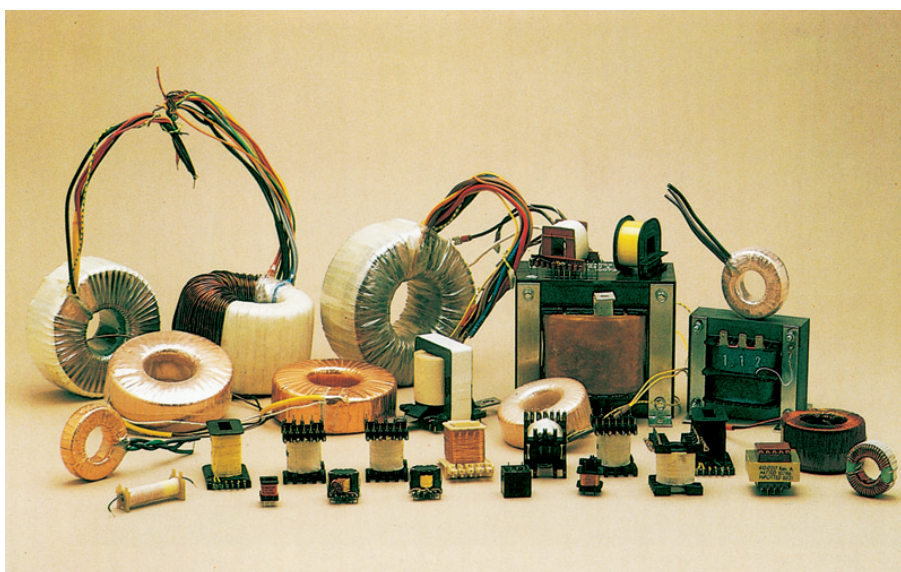

We in the PPI group of companies have the experience and the capability to offer products and services to all of our customers which can fulfil applications ranging from small developing niche areas to highly demanding technical challenges.

PPI - We don't just sell tape we sell quality solutions






The PPI range of foils and insulated foil/film laminates for transformer windings, static shields and safety isolation shields offers the following advantages:


1. Eliminates “HI-POT” problems.
2. Eliminates the danger of “shorted turn” effects in transformers.
3. Makes it easier and more economic to satisfy international safety regulations thus reducing the cost of approvals.
4. Reduces the “skin effect” problems experienced in high frequency transformers by using several insulated copper strips in parallel.
5. Reduces the cross sectional area of copper by switching from round conductors to foil, and therefore further reducing the “skin effect” and costs.
6. Reduces the need for inter-layer insulation and therefore increases the available winding space in the transformer, leading to more economic and/or better performance.
7. Reduces the level of inspection previously required for “HI-POT” failures, shorted turns etc.
8. Reduces labour costs.
9. More complex winding designs made easier by the availability of different combinations of insulated copper foils.
10. Increases product reliability from the design stage onwards.
11. Proven reliability - UL recognition for many of our products.




PPI FILM/FOIL LAMINATE CONSTRUCTIONS

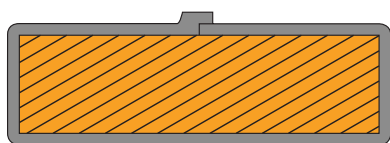

Standard Laminate

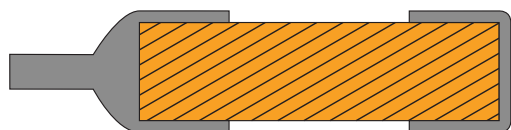


Offset Edge, Double Solder Gap

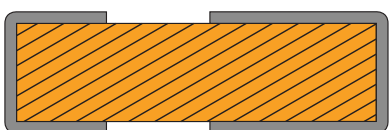


Offset Gap




Extended Cuffed Edge
Double Solder Gap

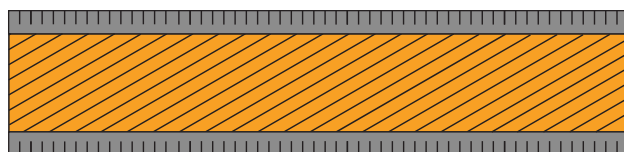


Fringed Film Edge



Multi-Foil Strips

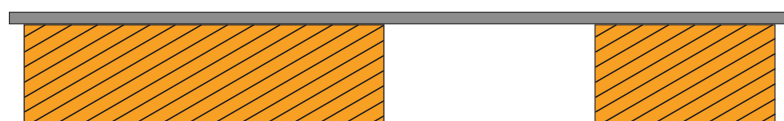


Different
Foil Widths



Different Foil
Thicknesses

Insulating Materials: Polyester, Polyethylenenaphtalate (PEN), Polyimide, Nomex® and Others

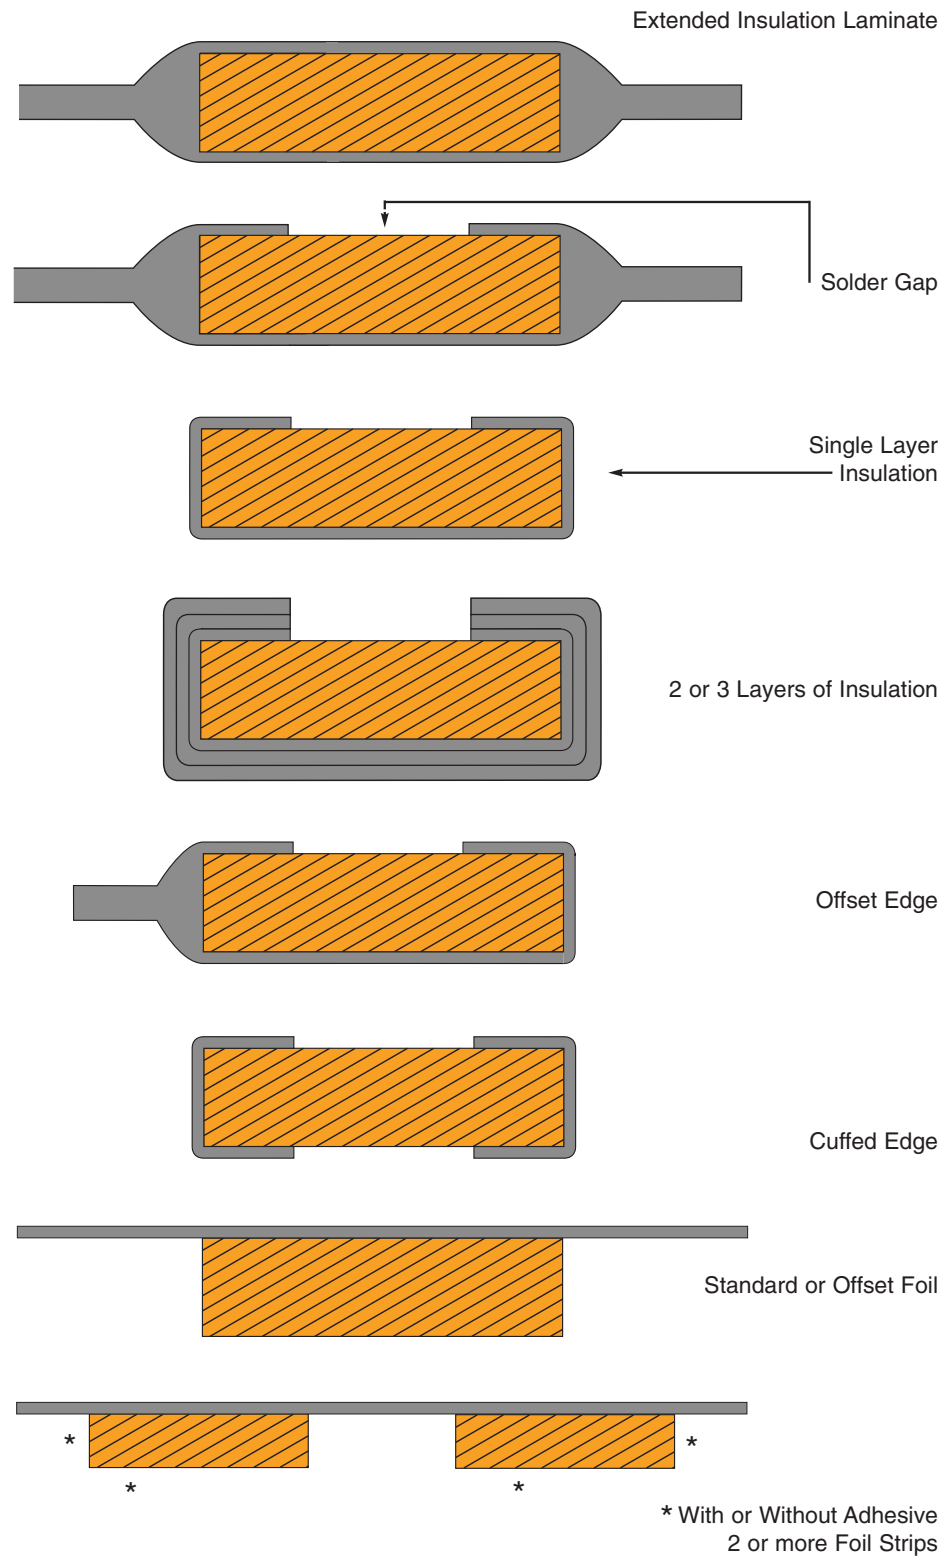

Standard Foils: Copper, Tin-Clad Copper & Aluminium



Static - shielding in transformers with PPI 1091 and PPI 10912 Fringed

PPI 1091 and PPI 10912 are specially formulated shielding tapes comprising a laminate of polyester - copper- polyester. the polyester is available in thicknesses of both 0,025 mm = 1 Mil and 0,050 mm = 2 Mil so that the dielectric strength required can be achieved.

PPI 1091 shields the entire inner width of the transformer spool whereas PPI 10912 offers even greater security because of its fringing on both edges which ensures complete insulation of the spool ends.

PPI 1091 and PPI 10912 are applied directly between the primary and secondary windings and the lead can be point soldered to the copper foil through the polyester film. The solder point should then be covered with a PPI self-adhesive insulating tape.

TYPICAL CONSTRUCTION

Polyester film	0,025 mm	1,0 Mil	0,025 mm	1,0 Mil	0,025 mm	1,0 Mil
Copper foil	0,035 mm	1,4 Mil	0,050 mm	2,0 Mil	0,100 mm	4,0 Mil
Polyester film	0,025 mm	1,0 Mil	0,025 mm	1,0 Mil	0,025 mm	1,0 Mil
Total Thickness	0,110 mm	4,3 Mil	0,130 mm	5,1 Mil	0,180 mm	7,0 Mil
Dielectric strength	5,0 KV	5000 V	5,0 KV	5000 V	5,0 KV	5000 V
Polyester film	0,050 mm	2,0 Mil	0,050 mm	2,0 Mil	0,050 mm	2,0 Mil
Copper foil	0,035 mm	1,4 Mil	0,050 mm	2,0 Mil	0,100 mm	4,0 Mil
Polyester film	0,050 mm	2,0 Mil	0,050 mm	2,0 Mil	0,050 mm	2,0 Mil
Total Thickness	0,160 mm	6,3 Mil	0,180 mm	7,0 Mil	0,230 mm	9,0 Mil
Dielectric strength	8,0 KV	8000 V	8,0 KV	8000 V	8,0 KV	8000 V

DIN-transformer	Inner Width	Safety Allowance	Cu-width	1091 Overall width	10912 fringed Overall width	Fringe depth	Fringe spacing
M 30	17,4 mm	0,6 mm	15 mm	18 mm	21 mm	2x1,5 mm	1 mm
M 42	26,3 mm	0,7 mm	24 mm	27 mm	30 mm	2x1,5 mm	1 mm
M 55	33,4 mm	0,6 mm	31 mm	34 mm	38 mm	2x2,0 mm	1 mm
M 65	38,8 mm	0,7 mm	36,5 mm	39 mm	43,5 mm	2x2,2 mm	1,5 mm
M 74	44,6 mm	0,4 mm	42 mm	45 mm	49 mm	2x2,0 mm	1,5 mm
M 85	48,6 mm	0,4 mm	46 mm	49 mm	53 mm	2x2,0 mm	1,5 mm
M 102	60,5 mm	0,5 mm	58 mm	61 mm	65 mm	2x2,0 mm	1,5 mm
EI 30	12,5 mm	0,5 mm	10 mm	13 mm	16 mm	2x1,5 mm	1 mm
EI 38	17,1 mm	0,4 mm	15 mm	17,5 mm	20,5 mm	2x1,5 mm	1 mm
EI 42	18,8 mm	0,7 mm	16,5 mm	19,5 mm	22,5 mm	2x1,5 mm	1 mm
EI 48	21,9 mm	0,6 mm	19,5 mm	22,5 mm	25,5 mm	2x1,5 mm	1 mm
EI 54	24,5 mm	0,5 mm	22 mm	25 mm	28 mm	2x1,5 mm	1 mm
EI 60	27 mm	0,6 mm	25 mm	27,5 mm	30 mm	2x1,2 mm	1 mm
EI 66	29 mm	0,5 mm	26,5 mm	29,5 mm	32,5 mm	2x1,5 mm	1 mm
EI 78	34,6 mm	0,4 mm	32 mm	35 mm	39 mm	2x2,0 mm	1,5 mm
EI 84	37,7 mm	0,8 mm	35,5 mm	38,5 mm	42,5 mm	2x2,0 mm	1,5 mm
EI 96	44 mm	0,5 mm	42 mm	44,5 mm	48,5 mm	2x2,0 mm	1,5 mm

Delivery Specification:


Standard copper thicknesses 0,025 mm = 1,0 Mil, 0,035 mm = 1,4 Mil, 0,050 mm = 2,0 Mil
0,100 mm = 4,0 Mil, 0,125 mm = 5,0 Mil up to 0,500 mm = 20 Mil

PPI -1091 all widths from 6 mm = 1/4 inch


PPI -10912 fringed all widths from 12 mm = 1/2 inch

Roll length up to 100 metres = 110 yds

* Other copper and polyester thicknesses may be supplied subject to availability and minimum order requirements.

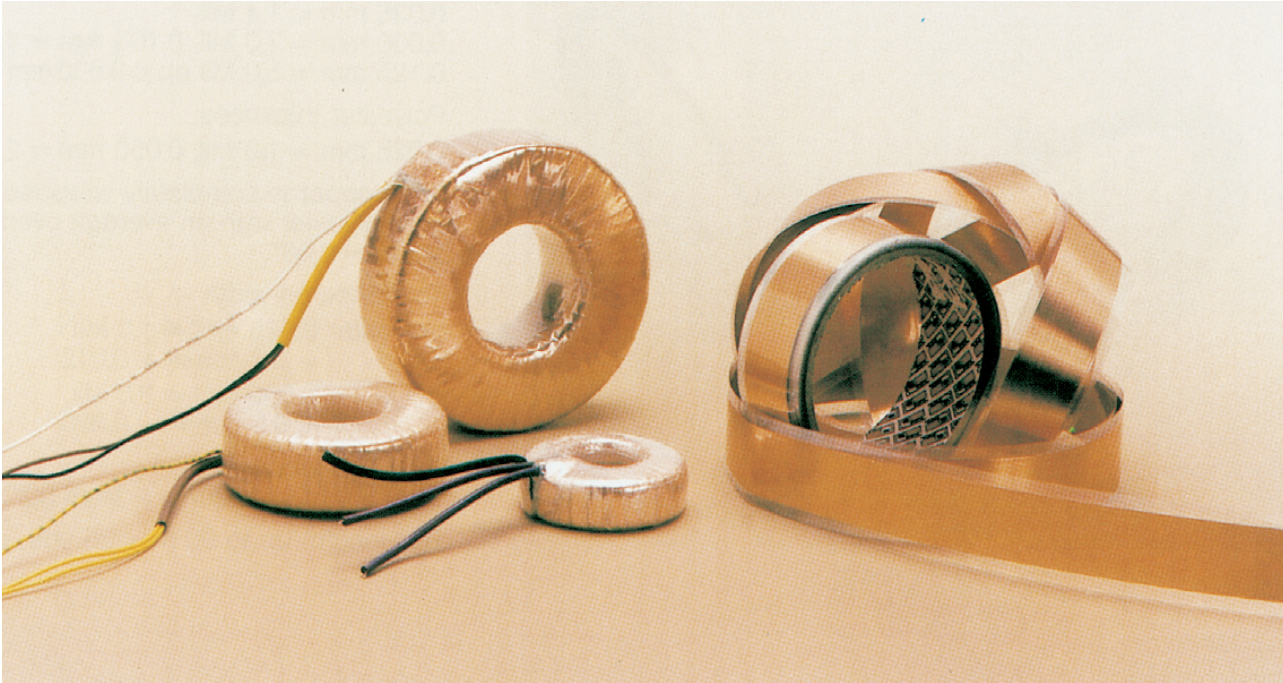

 **PPI 1091**

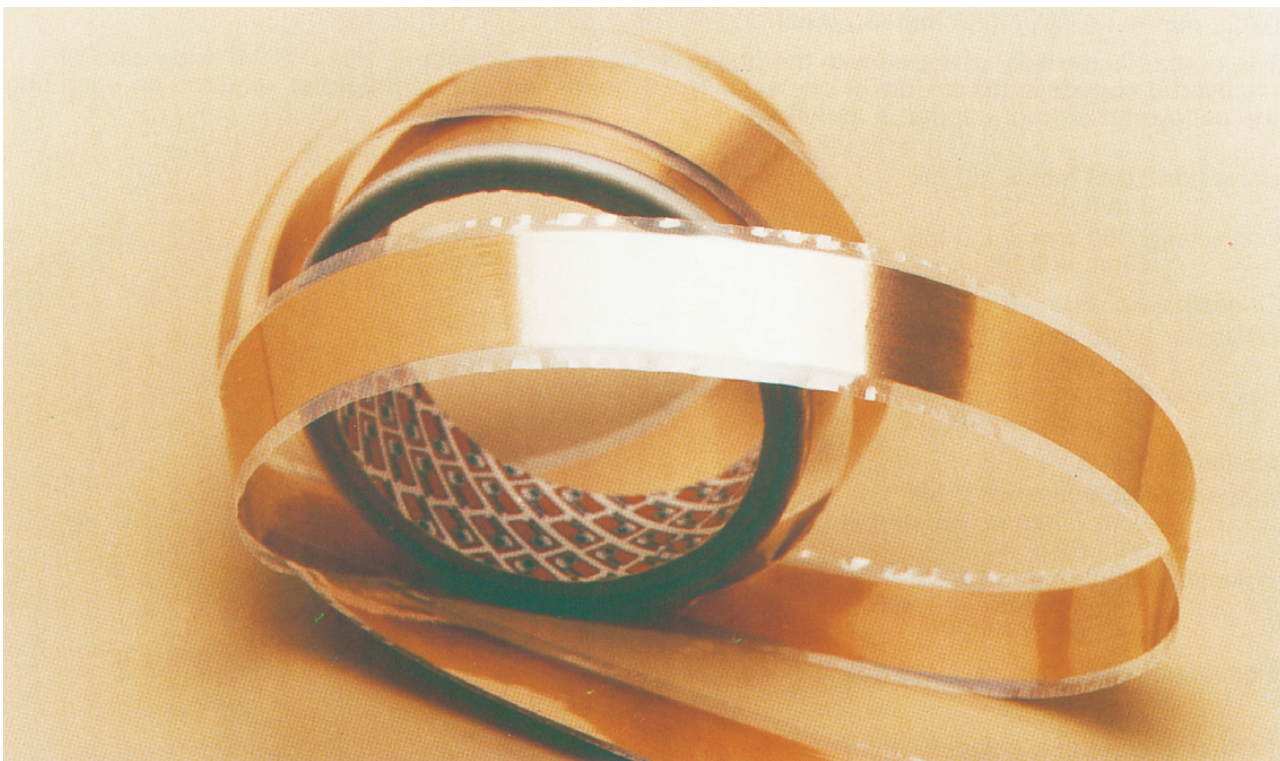

 **PPI 10912 Fringed**



STATIC SHIELDING OF TRANSFORMERS WITH PPI-1095 AND PPI-1096

PPI - 1095



Copper thickness*:
0,035 mm = 1,4 Mil,
0,050 mm = 2,0 Mil, 0,100 mm = 4,0 Mil,
0,125 mm = 5,0 Mil up to 0,500 mm=20Mil

Polyester thickness:
0,025 mm = 1,0 Mil, 0,050 mm = 2,0 Mil

The copper is completely wrapped with the polyester with an average overlap of 2 mm = 0,08".

Tolerance on width -
polyester 0,025 mm = 1,0 Mil
+ 0,3 mm = + 0,012
polyester 0,050 mm = 2,0 Mil
+ 0,5 mm = + 0,020

Available widths:
from 5 mm to 100 mm = from 0,2" to 4"

Roll length: up to 50 m = 55yds

PPI-1096

Copper Thickness*:
0,035 mm = 1,4 Mil, 0,050 mm = 2,0 Mil, 0,100 mm = 4,0 Mil, 0,125 mm = 5,0 Mil up to 0,500 mm = 20 Mil

Polyester Thickness:
0,025 mm = 1,0 Mil, 0,050 mm = 2,0 Mil

The copper is partially wrapped with the polyester leaving a minimum 1 mm = 0,04" wide strip of uncovered copper in the middle of one side. The minimum overlap of polyester required on each edge of the uncovered strip of copper is as follows:

polyester 0,025 mm = 1,0 Mil
3 mm = 0,12"
polyester 0,050 mm = 2,0 Mil
4 mm = 0,16"

Tolerance on width-
polyester 0,025 mm = 1,0 Mil
+ 3 mm = 0,012"
polyester 0,050 mm = 2,0 Mil
+0,5 mm = 0,020"


Available widths -
polyester 0,025 mm = 1,0 Mil
from 7 mm to 100 mm =
from 0,28" to 4"
polyester 0,050 mm = 2,0 Mil
from 9 mm to 100 mm =
from 0,36" to 4"

Roll length: up to 100 m = 110 yds



*Other copper and polyester thicknesses may be supplied subject to availability and minimum order requirements.

OTHER FORMS SHIELDS, FOILS AND LAMINATES

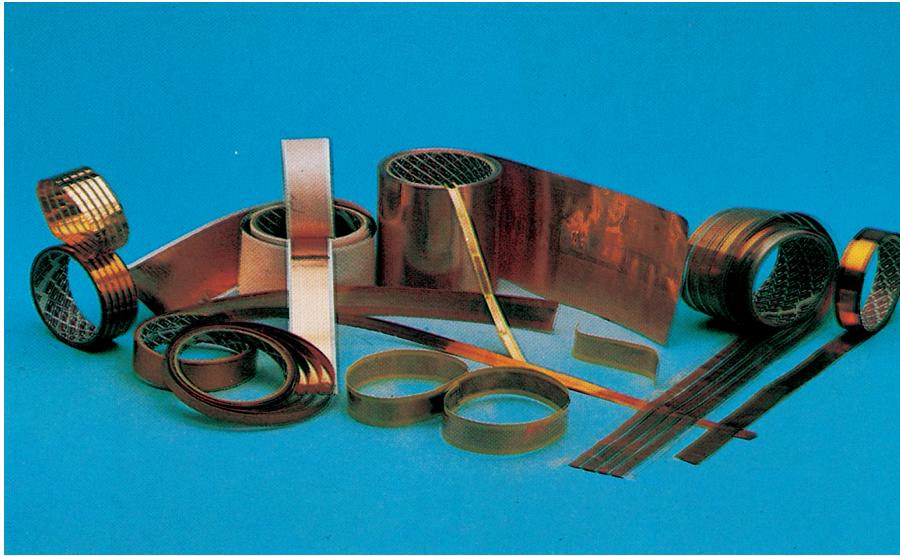

1. Similar to PPI 1091 and 10912 but with two or more parallel strips of copper.
2. Similar to PPI 1091, 10912, 1095 and 1096 but with a wide range of film thicknesses and other insulating materials such as Nomex® and Polyimide-Film for classes F and H insulation (®Registered Trade Mark DU POINT.)
3. Metal foils with insulation laminated on one or both sides.

Standard copper thicknesses:

0,025 mm = 1,0 Mil, 0,035 mm = 1,4 Mil,
0,050 mm = 2,0 Mil, 0,100 mm = 4,0 Mil,
0,125 mm = 5,0 Mil, 0,150 mm = 6,0 Mil,
0,200 mm = 8,0 Mil, 0,250 mm = 10,0 Mil,

Non standard thicknesses up to

0,500 mm = 20,0 Mil available on request.

Standard Tin-clad copper thickness:

0,035 mm = 1,4 Mil

Non standard thicknesses up to


0,100 mm = 4 Mil available on request.

Standard aluminium thicknesses:

0,030 mm = 1,2 Mil, 0,040 mm = 1,6 Mil,
0,060 mm = 2,4 Mil, 0,100 mm = 4,0 Mil


**Insulation for classes B, F and H
available as standard.**

Roll length up to 100 m = 110yds

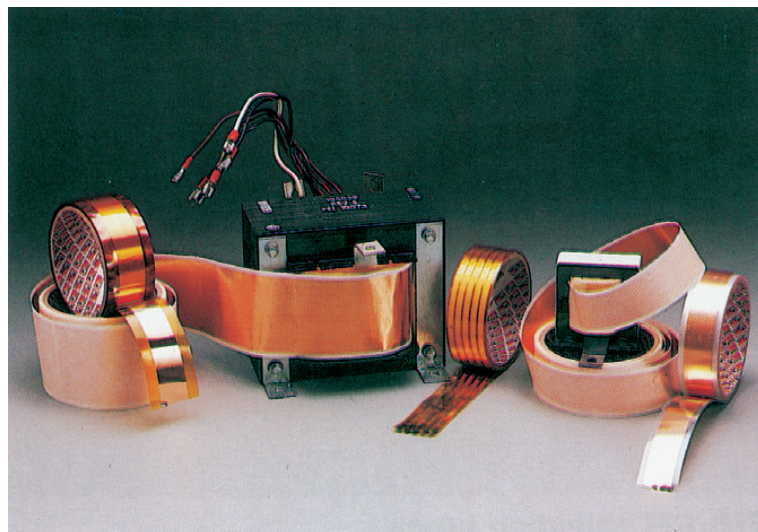




OTHER FORMS SHIELDS, FOILS AND LAMINATES

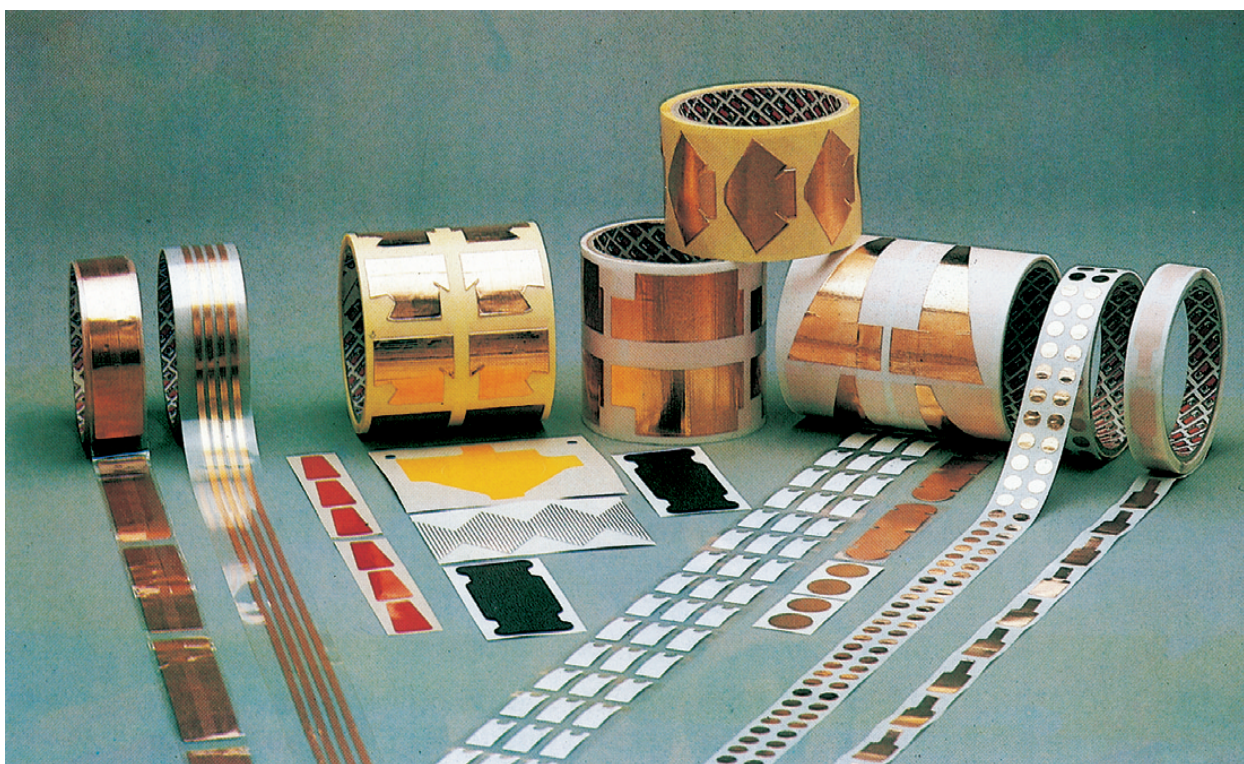

4. Special shapes and die-cut pieces of copper insulated in the same way as PPI 1091, 10912, 1095 and 1096 are available in a range of copper thicknesses up to 0,150 mm (6 Mls) to customer design and specification.

EMI/RFI SHIELDING TAPES FOR ELECTRONIC APPLICATIONS

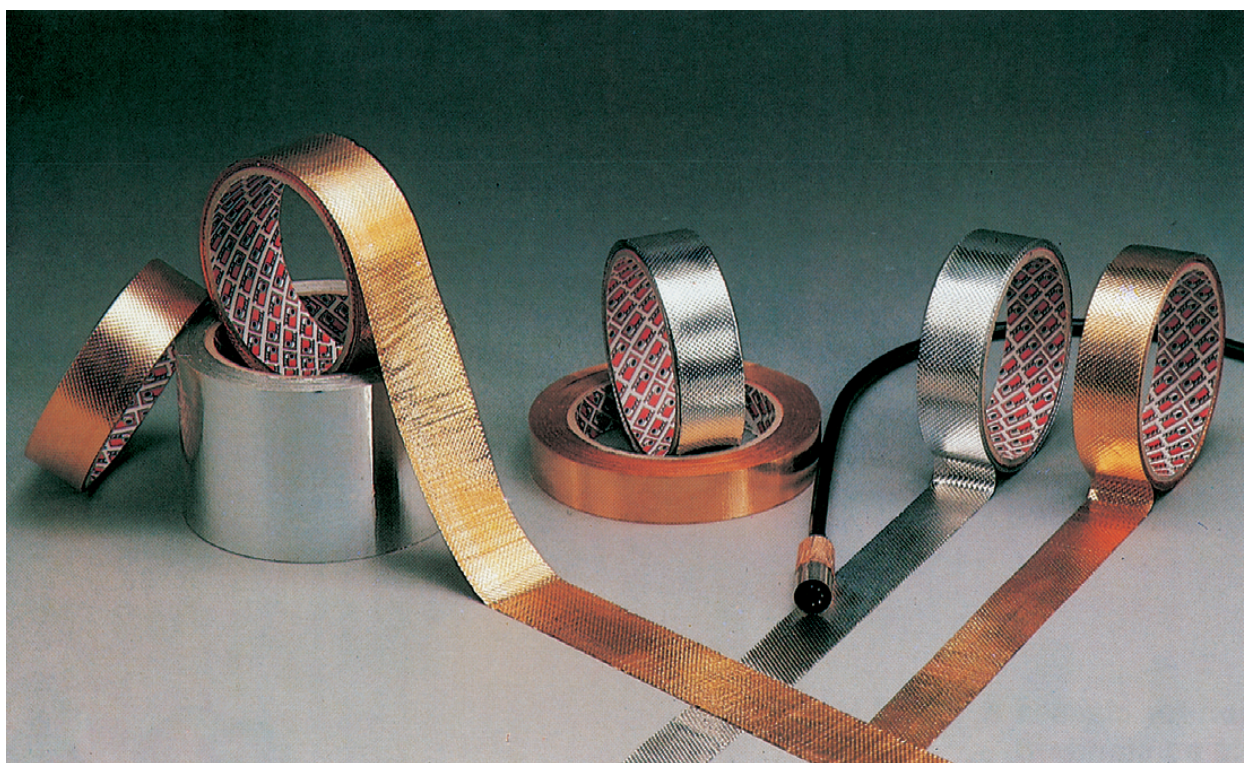

EMI/RFI shielding tapes

EMI/RFI SHIELDING TAPES FOR ELECTRONIC APPLICATIONS



PPI 9110: Copper tape with non-conductive adhesive.

Base thickness:	0,035 mm	1,4 Mil
Total thickness:	0,070 mm	2,75 Mil
Adhesive strength:	4,5 N/cm	41 oz/in.
Tensile strength:	55 N/cm	31 lbs/inch
Temperature resistance:	155°C	311°F

Also available in 0.025mm, 0.050mm, 0.075mm, 0.100mm, 0.150mm, 0.200mm.

PPI 9115: Copper tape with conductive adhesive for EMI/RFI shielding, static shielding, solderable.

Base thickness:	0,035 mm	1,4 Mil
Total thickness:	0,060 mm	2,4 Mil
Adhesive strength:	4,5 N/cm	41 oz/in.
Tensile strength:	55 N/cm	31 lbs/inch
Temperature resistance:	155°C	311°F

Also available in 0.025mm, 0.050mm, 0.075mm, 0.100mm, 0.150mm, 0.200mm.

PPI 9116: Copper tape with conductive adhesive for EMI/RFI shielding, bonding of conductive surfaces, electrical grounding.

Base thickness:	0,035 mm	1,4 Mil
Total thickness:	0,085 mm	3,4 Mil
Adhesive strength:	4,5 N/cm	41 oz/in.
Tensile strength:	55 N/cm	31 lbs/inch
Temperature resistance:	155°C	311°F

PPI 9120: Embossed copper tape, conductive through adhesive, lowest contact-resistance, for EMI/RFI shielding, static shielding, solderable.

Base thickness:	0,035 mm	1,4 Mil
Adhesive strength:	4,5 N/cm	41 oz/in.
Tensile strength:	55 N/cm	31 lbs/inch
Temperature resistance:	155°C	311°F

PPI 9015: Aluminium tape with conductive adhesive for EMI/RFI shielding, static shielding.

Base thickness:	0,040 mm	1,6 Mil
Total thickness:	0,065 mm	2,5 Mil
Adhesive strength:	4,5 N/cm	41 oz/in.
Tensile strength:	25 N/cm	14 lbs/inch
Temperature resistance:	155°C	311°F

PPI 9020: Embossed aluminium tape, conductive through adhesive, lowest contact resistant, for EMI/RFI shielding.

Base thickness:	0,040 mm	1,6 Mil
Adhesive strength:	4,5 N/cm	41 oz/in.
Tensile strength:	25 N/cm	14 lbs/inch
Temperature resistance:	155°C	311°F

All the above tapes are available with a removable interliner and also in DIE-CUT form.



TIN-CLAD COPPER EMI/RFI SHIELDING TAPES FOR ELECTRONIC APPLICATIONS

Tin Clad Copper is based on Copper foil which has been tin-clad on both sides to ensure good solderability and corrosion resistance.

PPI 9510: Tin-clad copper tape with non-conductive adhesive for EMI/RFI shielding, static shielding, solderable.

Base thickness:	0.035 mm	1,4 Mil
Total thickness:	0.060 mm	2,4 Mil
Adhesive strength:	4,5 N/cm	41 oz/in.
Tensile strength:	40 N/cm	22 lbs/inch
Temperature resistance:	155°C	311°F

PPI 9515: Tin-clad copper tape with conductive adhesive for EMI/RFI shielding, static shielding, solderable.

Base thickness:	0.035 mm	1,4 Mil
Total thickness:	0.060 mm	2,4 Mil
Adhesive strength:	4,5 N/cm	41 oz/in.
Tensile strength:	40 N/cm	22 lbs/inch
Temperature resistance:	155°C	311°F

PPI 9516: Tin-clad copper tape with conductive adhesive for EMI/RFI shielding, static shielding.

Base thickness:	0,035 mm	1,4 Mil
Total thickness:	0.085 mm	3,4 Mil
Adhesive strength:	4,5 N/cm	41 oz/in.
Tensile strength:	40 N/cm	22 lbs/inch
Temperature resistance:	155°C	311°F

PPI 9520: Embossed Tin-clad copper tape, conductive through adhesive, lowest contact resistance, for EMI/RFI shielding, static shielding, solderable.

Base thickness:	0,035 mm	1,4 Mil
Adhesive strength:	4.5 N/cm	41 oz/in.
Tensile strength:	40 N/cm	22 lbs/inch
Temperature resistance:	155°C	311°F


All the above tapes are available with a removable interliner and also in DIE-CUT form.



FREQUENCY	SHIELDING EFFECTIVENESS										
	1	2	3	4	5	6	7	8	9	10	11
20	62,5	62,5	62,5	62,5	62,5	62,5	62,5	62,5	62,5	62,5	62,5
30	64,5	64,5	64,5	64,5	64,5	64,5	64,5	64,5	64,5	64,5	64,5
40	64	64	64	64	64	64	62	64	64	64	64
50	60	62	61,5	63,5	63	62	63	64	62	63	63
60	63,5	64,5	65	67,5	64,5	67,5	67,5	67,5	67,5	67,5	63,5
70	58,5	60,5	60	65,5	63,5	59,5	64	66	62,5	64,5	66,5
80	57,5	59,5	57,5	63	62	58,5	62	64,5	60,5	63,5	65,5
90	55	57,5	56,5	62	60,5	62	60	62,5	59,5	61	62
100	54	56	54	60	60	57,5	58,5	60	56,5	60	60
150	50	55	54	58	56	54,5	55,5	57	56	54,5	54
200	57	57	53	61	60	55,5	58	57,5	58,5	60,5	58
250	60	70	52	63	61	59	59	56	63,5	63	59
300	59	59	49	59,5	61	60	55	53	59,5	60	57,5
350	58	54,5	52	57	57,5	55,5	53,5	51,5	59	59	58,5
400	55	54	58	56	57	55	50	57	57,5	57	57,5
450	57	54	58	54,5	59	54	47,5	56,5	59	59	60
500	60,5	59,5	55	53	60	54,5	50	52	57	61,5	60,5
600	66	66	46	62	67	64,5	58	51	68	67	68
700	58,5	57	55	58	59	51	51	58	53	55	55
800	60	53	52	60	57,5	56	50	62	54	52	52
900	52	44	43	55	49	41	54	54	39	45	44
1000	53,5	50	52,5	47,5	47,5	42,5	61,5	55	50	59	38
MHz.	dB.	dB.	dB.	dB.	dB.	dB.	dB.	dB.	dB.	dB.	dB.

SAMPLES:

- | | |
|-------------------------------|-------------------------------|
| 1. Plain copper foil 0,035 mm | 7. PPI 9515 Conduct. adhesive |
| 2. PPI 9110 | 8. PPI 9516 Conduct. adhesive |
| 3. PPI 9115 Conduct. adhesive | 9. PPI 9520 |
| 4. PPI 9116 Conduct. adhesive | 10. PPI 1091 0,035 mm |
| 5. PPI 9120 | 11. PPI 1091 0,15 |
| 6. PPI 9510 | |

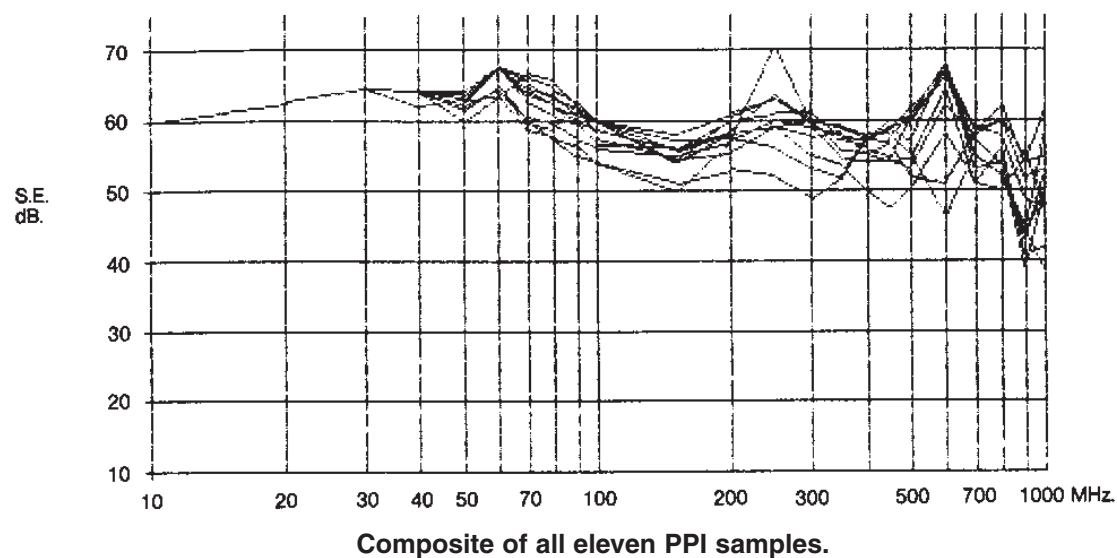



PCB EMI/RFI SHIELDING

Within the PPI Group we have our rotary die cutting division, Technical Adhesive Products Ltd. (TAP). As part of TAP's continuing development we have had extensive experience of producing EMI/RFI shields for many different PCB sizes. We have a worldwide reputation for the manufacture of smaller designs used by the light/movement sensor industry and also for large shields recommended for motherboard protection. Similarly, because we have all of the required materials and technologies within our group, we can offer our customers shields based on copper, tin clad copper, aluminium, polyester & polyimide substrates, all available in a multitude of thicknesses and shapes.

TECHNICAL DATA:



Copper foil thickness: 0.025, 0.035, 0.050mm, 0.075 mm, 0.100mm, 0.125mm, 0.150mm, 0.200mm.

Tin clad copper foil: 0.025 mm, 0.035mm, 0.125mm.

Aluminium foil thickness: 0.030, 0.040, 0.060 & 0.100 mm

Polyester film thickness: 0.025, 0.036, 0.050, 0.075, 0.100 mm

Polyimide film thickness: 0.025, 0.050, 0.075, 0.0125 mm

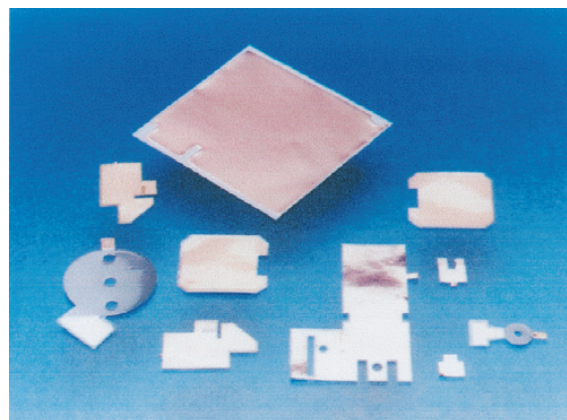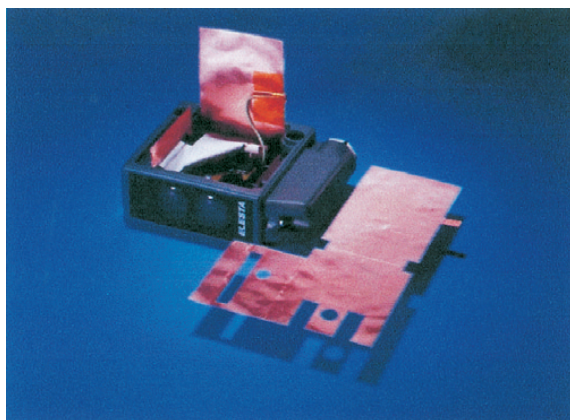

PPI Adhesive Products Ltd.

***manufacture specialised film/foil laminates
and die-cut forms of all products in the PPI range***

PPI-Delivery Specification:

All technical data are based on average values.

Test methods are based on international standards e.g. EN, VDE, DIN, BSS, IEC, ASTM, UL, MIL, AFERA and CEN.

Standard widths: 6, 9, 12, 15, 19, 25, 30, 38, 50, 60, 75, 100 mm. 1/4" to 4".

Special and intermediate widths can be supplied from 1 mm upwards in steps of 0,5 mm depending on PPI type.

1" = 25,4 mm.

Special colours are available on request.

PPI self-adhesive tapes are available in printed and die-cut-form - details on request.

Special tapes may be produced to customer's specification.

**Our group of companies also offer you:****PPI ADHESIVE PRODUCTS LTD.****PPI Self-adhesive tapes**

- For the electrical and electronic industries
- For the audio/video industries (splicing tapes, cleaning tapes, etc.)
- For printed circuit board assembly
- For shielding and winding transformer applications
- For a wide range of industrial and speciality applications (floor covering manufacture, masking tapes, etc.)

TECHNICAL ADHESIVE PRODUCTS LTD. (T.A.P)

Producer of precision die-cut adhesive components for electrical, electronic and general industrial applications.

T.A.P can offer experienced technical know how on all aspects of product die-cutting and design.

WATERFORD RESEARCH & DEVELOPMENT LTD.

Continuously develops self-adhesive products for our own group and for our interested customers. R&D develops new production techniques and market know-how on all aspects of adhesive products.

VALENTIA INDUSTRIES

Producer of single and double-sided siliconised polyester films in a range of thicknesses from 0.012mm to 0.190mm.

Available from 6mm to 1350mm width.

Customised release levels a speciality.

IMPORTANT NOTE TO PURCHASERS

All statements, technical data and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness is not guaranteed, and the following is made in lieu of all warranties, express or implied.

Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use or the inability to use the product. Before using, users shall determine the suitability of the product for their intended use, and users assume all risk and liability whatsoever in connection therewith.

No statement or recommendation not contained herein shall have any force or effect unless embodied in a written agreement signed by authorised officers of seller and manufacturer.



PPI SALES COMPANIES WORLDWIDE



PPI Adhesive Products Limited

Waterford Industrial Park
Cork Road
Waterford
Ireland
Tel: +353 (0) 51 373555
Fax: +353 (0) 51 377687
Email: info@ppi.ie



PPI Adhesive Products GmbH

Postfach 1224
51780 Lindlar
Germany
Tel: +49 (0) 2266 6137
Fax: +49 (0) 2266 7795
Email: ppi-germany-lindlar@t-online.de



PPI Adhesive Products (HK) Ltd

Room 2, Floor 19
Java Commercial Centre
128 Java Road
North Point
Hong Kong
Tel: +852 2751 7732
Fax: +852 2751 8553
Email: ppihk@netvigator.com



PPI Adhesive Products (Korea) Ltd

Room #306 Kumku Building
1718-4 Seocho-Dong
Seocho-Ku
Seoul 137-070
Korea
Tel: +82 (0) 2 5365198
Fax: +82 (0) 2 5363490
Email: ppikorea@unitel.co.kr



PPI Adhesive Products (M) SDN BHD

74A, Jalan Prai Jaya 4
Bandar Prai Jaya
13600 Butterworth
Penang
Malaysia
Tel: +60 (0) 4 390 6228
Fax: +60 (0) 4 397 6228
Email: ppien@pd.jaring.my



PPI Adhesive Products (F.E.) PTE Ltd

629 Aljunied Road #03-11
Cititech Industrial Building
Singapore 389838
Republic of Singapore
Tel: +65 6746 3177
Fax: +65 6745 1815
Email: ppife@singnet.com.sg



PPI Adhesive Products (C.E.) s.r.o.

Dolna 62
Banska Bystrica
Slovakia
Tel: +421 48 470 0551
Fax: +421 48 415 3363
Email: office@ppi.sk



PPI Adhesive Products Pty. Ltd.

P.O. Box 3127
Rivonia 2128
South Africa
Tel: +0027 11 8072744 / 5348
Fax: +0027 11 8038179
Email: ppi@mweb.co.za



PPI Adhesive Products AG

August Keller Strasse 22
CH-5600 Lenzburg
Switzerland
Tel: +41 (0)62-888 8030
Fax: +41 (0)62-888 8040



PPI Adhesive Products (UK)

David Butcher
21 Foredrift Close
Southcrest, Redditch
Worcestershire B98 7NP
England
Tel/Fax: +44 (0) 1527 547232
Mobile : +44 (0) 7779 084696
Email: dbutcherppi@fsmail.net

Neil Priest
60 County Drive, Tamworth
Staffordshire B78 3XF
Tel/Fax: +44 (0) 1827 54354
Mobile : +44 (0) 7967 663345
Email: Neil.Priest@btinternet.com



Technical Adhesive Products Trading Co. FZE

P.O. Box: 41978 Hamriyah Free Zone
Sharjah
United Arab Emirates
Tel.: +9971 5263101
Fax: +9971 5263102
Email: tape@emirates.net.ae



PPI Adhesive Products Corp.

580 Reed Road A5
Broomall, PA 19008
USA
Tel: +1 610 353 7090
Fax: +1 610 353 7566
Email: ppitapes@aol.com