

EARTHING SYSTEMS

PTA Series clamp




Reliable, robust, handy and easy to use, PTA Series clamps are the ideal tool for tanker loading platform equipped with electronic devices to signal correct grounding. They can be easily connected to any grip, even rusty ones.

They are made of aluminium and the electrical continuity is ensured by the carbonitrided steel contact tips which make a firm connection to any foothold having a thickness between 2 and 20 mm

TECHNICAL FEATURES

Material	Aluminium with low content of copper
IP rating	IP65
Ambient temperature range	-20°C to +55°C
Approvals	CESI 03 ATEX 101 X
Marking	II 2 GD Ex-d IIC T6 Ex-tD A21 IP65 T85°C
Nominal current In	10 A
Insulation voltage	3 kV
Accessories available upon request	Cable reel

Dimensions PTA

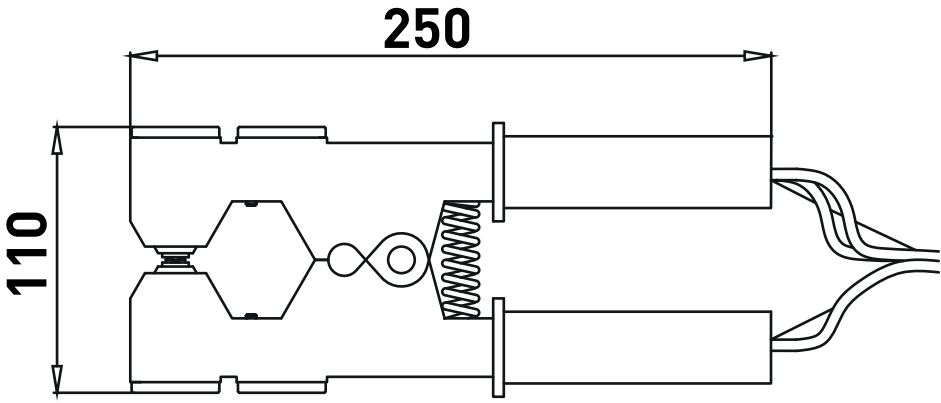

PTA Series clamps

TYPE	CODE	DIMENSIONS [mm]			WEIGHT [kg]	CLAMP OPENING [mm]	CABLE TYPE	CABLE LENGHT [mt]
		LENGHT	WIDTH	HEIGHT				
PTA ISEO-1	B0602.000001	250	110	35	1.56	3-20	1x6mm ² PUR	11
PTA ISEO-2	B0602.000002	250	110	35	3.36	3-20	3x3mm ² PUR	11

PTA ISEO-1: Simply Earth clamp with yellow/green cable.
PTA ISEO-2: Double circuit Earth clamp, suitable to be combined with our Earth control system GUMT-325.